

RM21706


2U General Purpose Server Chassis



Rear View



Inside View

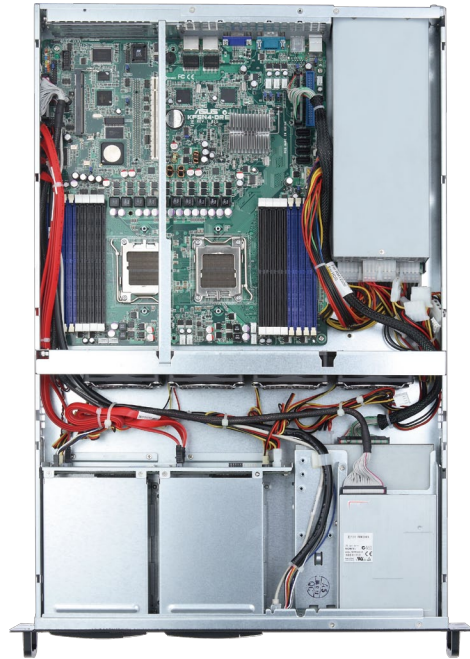

1 x 3.5" bay for FDD or SK51201



1 x 5.25" bay for ODD or SK31101



1 x 3.5" Internal bays for 2.5" HDD



Slim ODD + Slim FDD



Changeable low profile rear window



Optional 4 x middle hot-swap fans

Features & Benefits

- Support M/B up to 12" x 13"
- Support 6Gb/s mini-SAS and SATA backplane
- Versatile configurations available via exposed 1 x 5.25" and 1 x 3.5" bays
- Optional 4 x hot-swap fan modules
- Support 3-slot full height and 6-slot low profile rear windows
- Support 2U single and 1+1 redundant PSU

Specification

Model Name	• RM21706
M/B Form Factor	• Extended ATX (12" x 13")
Dimension (D x W x H)	• 660 x 430 x 88 (mm), 26" x 16.9" x 3.5"
Drive Bay	• Exposed: 1 x 5.25", 1 x 3.5", 6 x 3.5" Hot-swap (RM21706); Internal: 1 x 3.5"
PSU Form Factor	• 2U Single or 1+1 Redundant
Indicator	• 1 x Power Status, 1 x HDD Activity, 2 x LAN Activity • 1 x Fan Failure and Overheat
Front Control	• Power On/Off, Alarm Mute, System Reset, 1 x USB2.0
System Security	• Intrusion Switch
Cooling Fan	• Middle: 4 x 80mm • Rear: 2 x 40mm (Option)
Slot Opening	• 3 x Full Height and Full Length or 6 x Low Profile
HDD Backplane	• 6Gb/s SATA or mini-SAS
Metal Thickness	• 1.2mm
Net Weight	• 9.5kg
Gross Weight	• 13.4kg
Front Bezel	• Option
Cubic Feet	• 4.26
Container Info (Single Packing)	• 20': 250, 40': 520, 40'H: 575

Optional Items

	Order Code	Description
Storage Kits	◆ Note1.	2.5" or 3.5"HDD storage kits
Bracket	84H321410-018	For C2W-5820V/5620V
PCB	84H331410-025	Chassis Management Board
Backplane	84H321710-042	1x 6-Port 6Gb/s SATA, w/Mounting Bracket
	84H321710-043	1x 6-Port 6Gb/s mini-SAS, w/Mounting Bracket
Cable	26H113215-030	SFF-8087 to SFF-8087, 600mm
Slide Rail	84H321510-022	26", Ball Bearing
	84H321710-041	26", Ball Bearing, Tool-less
Riser Card	80H09323201B0	2U 2-Slot, 1x PCI-e 16x+ 1x PCI-X w/100mm cable link
	80H09323202B0	2U 2-Slot, 1x PCI-e 16x+ 1x PCI-X (Dummy)
Fan	84H321710-010	40mm, 3P3C, L300mm, w/screws
Bezel	88H321500-001	2U, Plastic(Stripe)
	84H321410-033	2U, Plastic(SilFox)
	84H321410-049	2U, Plastic(Net)
	84H321510-076	2U, Plastic(Bricker)

◆ **Note1.** SK51101 / SK51102 / SK51201 / SK41203 / SK31101 / SK41101 / SK41202

※ PSU ※ M/B Support ※ I/O Gasket ※ Air Duct ※ (Detailed in CHENBRO websites)

Order Information

Order Code	M/B	Backplane	Cooling Fan(mm)	PCI Slot	PSU	Slide Rail
RM21706T2-L	12"x13"	3.5", 6Gb/s SATA	4x8032	6 x LP	Option	Option
RM21706T2	12"x13"	3.5", 6Gb/s SATA	4x8032	3 x FF	Option	Option
RM21700-L	12"x13"	N/A	3x8025	6 x LP	Option	Option