

QBiX-Pro-GLKA5005HD-A1

DIN Rail industrial system with Intel® Pentium® Silver J5005 Processor



Features

- System Size : 160W x 118D x 62.6H (mm)
- Intel® Pentium® Silver J5005 Processor
- Single Channel DDR4 2400 MHz
- 4 x switchable COM ports (RS-232/422/485)
- GPIO Port (8 Bits)
- 2 x GbE LAN ports


Specifications

Dimension	System Size : 160W x 118D x 62.6H (mm)
CPU	Intel® Pentium® Silver J5005 Processor 14nm, 4 cores, 4 threads, up to 2.8 GHz TDP 10W
Chipset	SoC
Memory	1 x DDR4 SO-DIMM sockets, Max. Capacity 8 GB Support Single Channel DDR4 2400MHz memory modules
Ethernet	2 x GbE LAN ports (Intel® i211AT)
Graphic support	Integrated Graphics Processor - Intel® UHD Graphics 605: 1 x HDMI 1.4 port, supporting a maximum resolution of 4096x2160 @60Hz 1 x VGA port, supporting a maximum resolution of 2560x1600 @60Hz (2 independent display outputs)
Audio	Realtek® Audio codec
Storage	1 x 2.5" HDD/SSD (SATA 6Gb/s)
Expansion Slots	1 x 2280 M.2 M-Key (SATA 6Gb/s) 1 x 2230 M.2 E-Key (WiFi/BT) 1 x Full-size Mini PCIe with SIM slot (PCIe x1 + USB2.0) -- support 3G/4G module 1 x Vertical USB 2.0
Front I/O	2 x RJ45 LAN ports 4 x USB 3.0 1 x HDMI 1 x VGA 2 x COM ports (RS-232/422/485 and RI/5V/12V) 1 x Power button with LED 1 x WiFi/HDD LED 1 x Remote control connector 1 x Headphone Jack 1 x External Antenna Hole (Optional)
Rear I/O	1 x Din Rail Mounting Support
Side I/O	1 x GPIO (8 bit) 1 x 3-pin Terminal Block 2 x COM ports (RS-232/422/485) 2 x External Antenna Hole (Optional)
Power	+9~36VDC (Full Range) +9~48VDC (Optional)
Operation temperature	Operating temperature: 0°C to 50°C Operating humidity: 0~90% (non-condensing) Non-operating temperature: -20°C to 70°C Non-operating humidity: 0%~95% (non-condensing) Use wide temperature range memory and storage
Vibration During Operation	Operation: IEC 60068-2-64, 3 Grms, random, 5 ~ 500 Hz, 1 hr / Per Axis, With SSD/M.2 2280 Non-operation: IEC 60068-2-6, 2 G, Sine, 10 ~ 500 Hz, 1 Oct/min, 1 hr / Per Axis
Shock During Operation	Operation: IEC 60068-2-27, 50 G, half sine, 11 ms duration, With SSD

GIGAIPC reserves the right to modify or change technical data without prior notice.

Dimension

Unit: mm

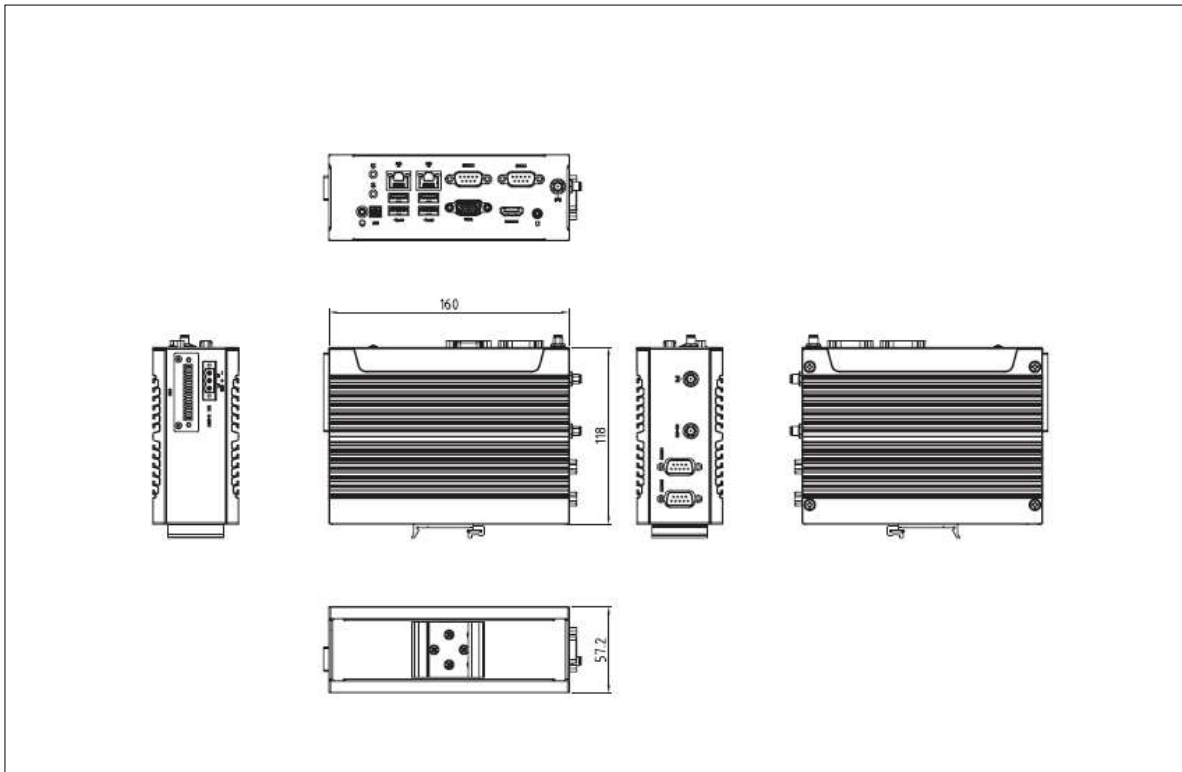

Packing Content

- Box Packing Capacity: 6pcs
- Carton size: 416 x 409 x 347(mm)
- Content:
 - SCREW HDD M3x3L x 4 (P/N: 25984G-1C014-S00)
 - TERMINAL BLOCKS MALE PLUG x 1 (P/N: 25I00-5ESDV0-D2R)
 - TERMINAL BLOCKS 1*2P x 1 (P/N: 25I00-EC3500-D2R)
 - TERMINAL BLOCKS 1*10P x 1 (P/N: 25I00-EC3810-D2R)

Order Information

- System: 6BQP5005AMR-SI

OPTIONAL KIT

- TPM 2.0 module P/N: 9CTM000NR-00
- TPM Cable P/N: 25CRZ-100600-S9R

GIGAIPC reserves the right to modify or change technical data without prior notice.