

N150KGE DNV Monitor

Productsheet N150KGE (2021-08)

Dutch design & production

N-Line Panel Mount Glass

Panel Mount Glass monitors are built-in monitors and can be flush-mounted into a desk or recess. The monitors are made of metal with a full glass front. As such, the monitors are waterproof at the front.



Panel:

Display	15.0 inch
Active area HxV	304.1x228.1
Aspect ratio	4:3
Resolution	1024x768
Viewing angle U/D/L/R	89/89/89/89
Contrast ratio	2500
Native Brightness (cd/m ²)	500
High Bright ¹ - option	1000

Video inputs:

HDMI	V
DVI-D	V
VGA	V
CVBS (BNC)	V

Power input:

12VDC (Desktop PSU 115/230VAC)	V
9~36VDC (Galvanic isolated)	V (2p screw)

Touchscreen:

Resistive (USB & RS232)	x
Projected capacitive (USB or RS232)	V

Environmental:

Operating temperature (°C)	-20 to 75
Protection rate front (IEC 60529)	IP65

Dutch design & production

Controls:

On-front dimming	V
External dimming	O
Light Sensor Auto Dimming	x
RS-485 NCOM	O
NControl	O

Dimensions:


Unit WxHxD (mm)	363.1x305.1x66
Packaging WxHxD (mm)	610x440x150
Weight (without options) (kg)	5,3
Weight (incl. all options) (kg)	Not available
Weight (incl. packaging) (kg)	Not available

Certificates:

CE	V
IEC60945	V
DNVGL	V

Optional enhancements:

High Bright LED ¹	O
Anti Glare Glass ²	V
Optical Bonding ³	V

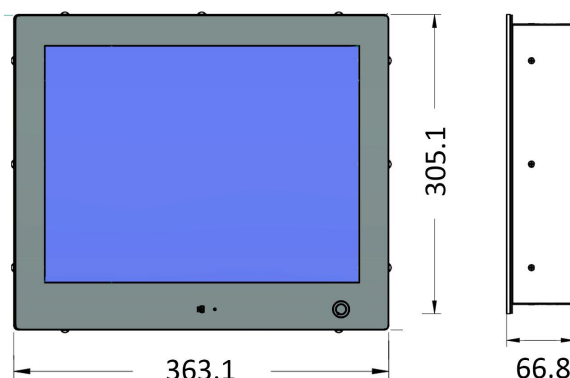

1) High Bright

The deployment of High Bright LED ensures that monitors can be read, also in case of extremely bright (sun)light. Where a standard monitor provides about 400 nits of light output, the upgrade to high bright LED could achieve 1500 nits or more. This option is often applied in combination with Optical Bonding.

2) Anti Glare Glass

Anti Glare glass is a float glass with a high resolution and no reflective effect. The glass is almost free from any bothersome reflection. It is suitable as a mountable lens for high resolution screens and premium displays.

3) Optical Bonding

During Optical Bonding a gel coating is applied between the LCD surface and the glass. As a result, the lack of extra light refraction becomes the main feature, in addition to the advantages of absence of dust and moist, as also resistance to vandalism. Another major advantage is the faster heat drainage. In terms of image, the contrast and brightness are enhanced. A clear image is created when a combination is made with one of the other techniques.